

# Alfa Laval T20

## Gasketed plate heat exchanger for a wide range of applications

### Introduction

Alfa Laval Industrial line is a wide product range that is used in virtually all types of industry.

Suitable for a wide range applications, this model is available with a large selection of plate and gasket types.

### Applications

- Biotech and Pharmaceutical
- Chemicals
- Energy and Utilities
- Food and Beverages
- Home and Personal care
- HVAC and Refrigeration
- Machinery and Manufacturing
- Marine and Transportation
- Mining, Minerals and Pigments
- Pulp and Paper
- Semiconductor and Electronics
- Steel
- Water and Waste treatment

### Benefits


- High energy efficiency – low operating cost
- Flexible configuration – heat transfer area can be modified
- Easy to install – compact design
- High serviceability – easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

### Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features, depending on configuration some features may not be applicable:



- Five-point alignment
- Reinforced hanger
- Chocolate pattern distribution area
- Glued gasket
- Clip-on gasket
- Offset gasket groove
- Leak chamber
- Bearing boxes

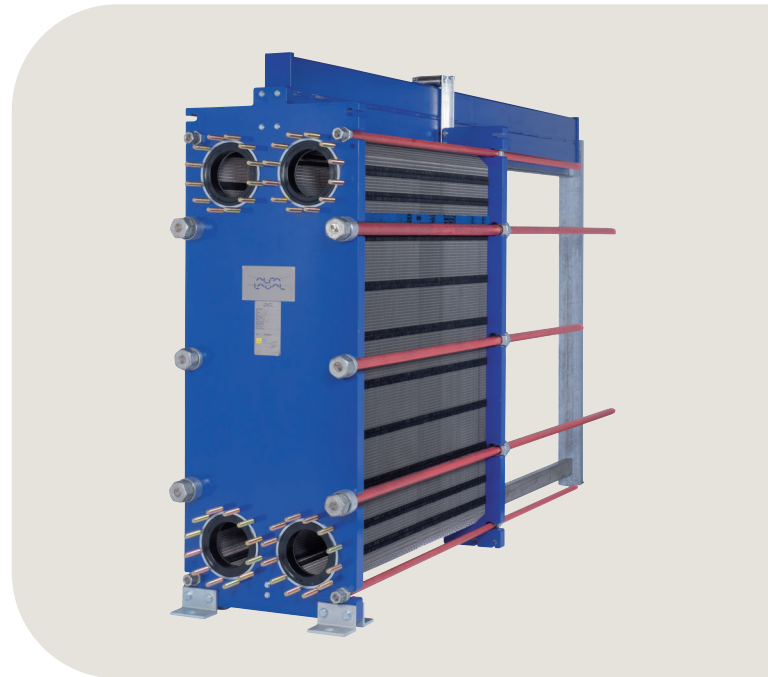

- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- Lock washer
- Pressure plate roller
- Tightening bolt cover

### Alfa Laval 360° Service Portfolio

Our extensive service offering ensure top performance from your Alfa Laval equipment throughout its life cycle. The Alfa Laval 360 Service Portfolio include installation services, cleaning and repair as well as spare parts, technical documentation and trouble shooting. We also offer replacement, retrofit, monitoring and much more.


For information about our complete service offering and how to contact us - please visit [www.alfalaval.com/service](http://www.alfalaval.com/service).

## General remarks for technical information

- The global offering presented in this leaflet may not be available for all regions
- All combinations may not be configurable

## Dimensional drawing

Measurements mm (inches)

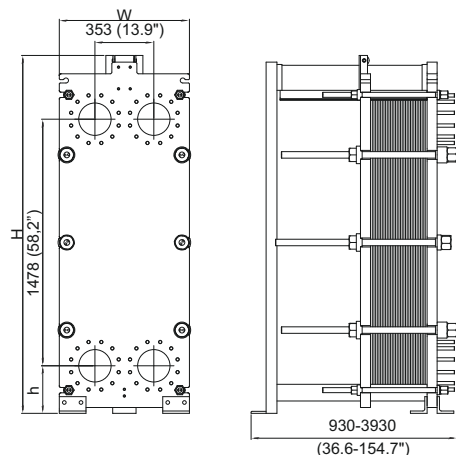

Type	H	W	h
T20-FM, pvcALS	2141 (84.3")	780 (30.7")	280 (11.0")
T20-FM, PED	2146 (84.5")	755 (27.7")	285 (11.2")
T20-FG	2146 (84.5")	780 (30.7")	285 (11.2")
T20-FS	2183 (85.9")	780 (30.7")	323 (12.7")

## Technical data

Plates	Type	Free channel, mm (inches)
T20-B	Single plate	1.9 (0.075)
T20-M	Single plate	4.0 (0.16)
T20-P	Single plate	2.9 (0.11)

## Materials

Heat transfer plates	304/304L, 316/316L, 254, Alloy 33 C-276, C-2000 Ni, Ti
Field gaskets	NBR, EPDM, FKM, HNBR, HeatSeal Carbon steel
Flange connections	Metal lined: stainless steel, Alloy C-276, titanium Rubber lined
Frame and pressure plate	Carbon steel, epoxy painted

Other materials may be available on request

## Operational data

Frame, PV-code	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FM, pvcALS	10.0/145	180/356
FM, PED	10.0/145	120/248
FG, pvcALS	16.0/232	180/356
FG, ASME	10.3/150	249/480
FG, PED	16.0/232	180/356

Frame, PV-code	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FD, ASME	20.7/300	249/480
FS, pvcALS	29.5/427	200/392
FS, ASME	27.6/400	249/480
FS, PED	30.0/435	160/320

Extended pressure and temperature rating may be available on request.

## Flange connections

Frame model	Connection standard
FM, pvcALS	EN 1092-1 DN200 PN10
	ASME B16.5 Class 150 NPS 8
	JIS B2220 10K 200A
FM, PED	EN 1092-1 DN200 PN10
	ASME B16.5 Class 150 NPS 8
FG, pvcALS	EN 1092-1 DN200 PN16
	EN 1092-1 DN200 PN25
	ASME B16.5 Class 150 NPS 8
	JIS B2220 10K 200A
FG, ASME	ASME B16.5 Class 150 NPS 8
	EN 1092-1 DN200 PN10
FG, PED	EN 1092-1 DN200 PN16
	EN 1092-1 DN200 PN25
	ASME B16.5 Class 150 NPS 8
FD, ASME	ASME B16.5 Class 150 NPS 8
	ASME B16.5 Class 300 NPS 8
FDc, ASME	EN 1092-1 DN200 PN25
	EN 1092-1 DN200 PN40
FS, pvcALS	ASME B16.5 Class 300 NPS 8
	ASME B16.5 Class 400 NPS 8
	JIS B2220 20K 200A
	ASME B16.5 Class 300 NPS 8
FS, ASME	ASME B16.5 Class 400 NPS 8
	EN 1092-1 DN200 PN25
FS, PED	EN 1092-1 DN200 PN40
	ASME B16.5 Class 400 NPS 8

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T 9115.

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

## How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at [www.alfalaval.com](http://www.alfalaval.com)